

Product range for Nordic Wood LINEAR S

SCREW MOUNTING



PANEL DIMENSIONS	SLAT SIZES					
	18x28	20x40	20x68	28x28	45x45	Special size on request
VISIBLE EDGE TYPE	<p>EDGE B</p> <p>3-4 mm</p>			<p>WOOD QUALITY</p> <p>PREMIUM</p> <p>ECO</p> <p>* Spruce only eco</p>		
WOOD SPECIES	BIRCH	SPRUCE	PINE	LARCH	OAK	THERMO NEW
FINISHING	VARNISH	STAIN	WAX COLOR	OIL	NATURAL	
ACOUSTIK FLEECE	WHITE	GREY	BLACK	<ul style="list-style-type: none"> Acoustic properties High puncture and tear resistance Moisture resistance and non-fraying Fire resistance- classified B-s1,d0 		
SOUND ABSORPTION VALUES	<p>$\alpha_w=0,9$</p> <p>ABSORPTION CLASS: * Class A</p> <p>MEASURED CURVE</p> <p>REFERENCE CURVE</p> <p>FREQUENCY (Hz)</p>			<p>REACTION TO FIRE **</p> <p>ACCORDING TO EN 13501-1</p> <p>B-s₁,d₀</p>		

* Acoustic absorption as per ISO 354 standard, various data calculated according to ISO. Nordic Wood Linear + addition MW 20 mm.
** Depending on the type of wood




















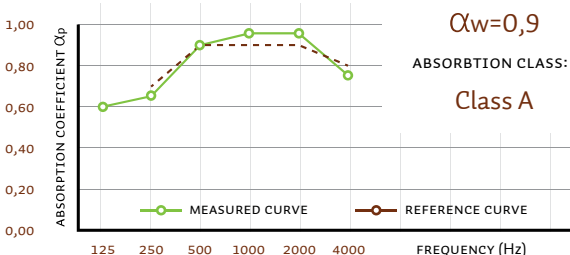
PRODUCT RANGE

- 1. LINEAR S 28/14**
600
28
18 24,9 15
- 2. LINEAR S 28/18**
600
28
18 15,3 15
- 3. LINEAR S 40/8**
600
40
20 55 15
- 4. LINEAR S 40/10**
600
40
20 40 15
- 5. LINEAR S 40/11**
600
40
20 34,5 15
- 6. LINEAR S 40/13**
600
40
20 26,2 15
- 7. LINEAR S 68/5**
600
68
20 100 15
- 8. LINEAR S 68/6**
600
68
20 80 15
- 9. LINEAR S 68/7**
600
68
20 65,7 15
- 10. LINEAR S 28/10**
600
28
28 32 15
- 11. LINEAR S 45/5**
600
45
45 75 15
- 12. SPECIAL ON REQUEST**

Product range for Nordic Wood LINEAR T

MOUNTING T-PROFILE



SLAT SIZES	 18x28	 20x40	 20x68	 28x28	 45x45	 Special size on request
PANEL DIMENSIONS	<div>600x600</div>		<div>600x1200</div>		<div>600x1800</div>	<div>Special size</div>
VISIBLE EDGE TYPE	EDGE E 		EDGE C 		WOOD QUALITY	
					PREMIUM 	ECO  * Spruce only eco
WOOD SPECIES	BIRCH 	SPRUCE 	PINE 	LARCH 	OAK 	THERMO  NEW
FINISHING	<div>VARNISH</div>	<div>STAIN</div>	<div>WAX COLOR</div>	<div>OIL</div>	<div>NATURAL</div>	
ACOUSTIK FLEECE	WHITE 	GREY 	BLACK 	<ul style="list-style-type: none">• Acoustic properties• High puncture and tear resistance• Moisture resistance and non-fraying• Fire resistance- classified B-s1,d0		
SOUND ABSORPTION VALUES	 <p>$\alpha_w=0,9$ ABSORPTION CLASS: * Class A</p> <p>MEASURED CURVE REFERENCE CURVE</p> <p>FREQUENCY (Hz)</p>				<p>REACTION TO FIRE **</p> <p>ACCORDING TO EN 13501-1 B-s₁,d₀</p>	
<p>* Acoustic absorption as per ISO 354 standard, various data calculated according to ISO. Nordic Wood Linear + addition MW 20 mm.</p> <p>** Depending on the type of wood</p>						

* Acoustic absorption as per ISO 354 standard, various data calculated according to ISO. Nordic Wood Linear + addition MW 20 mm.
** Depending on the type of wood

PRODUCT RANGE


- LINEAR T 28/14**
- LINEAR T 28/18**
- LINEAR T 40/8**
- LINEAR T 40/10**
- LINEAR T 40/11**
- LINEAR T 40/13**
- LINEAR T 68/5**
- LINEAR T 68/6**
- LINEAR T 68/7**
- LINEAR TSQ 28/10**
- LINEAR T 45/5**
- SPECIAL ON REQUEST**

Product range for Nordic Wood LINEAR SPECIAL

T-PROFILE, SCREW MOUNTING




SLAT SIZES

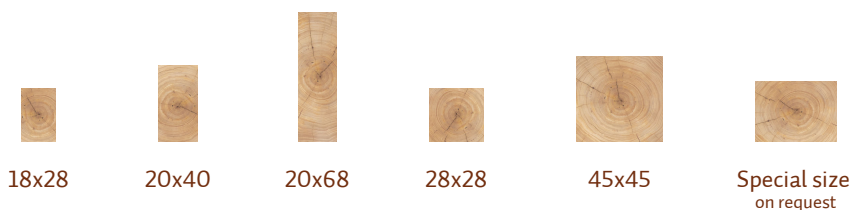

PANEL DIMENSIONS



VISIBLE EDGE TYPE

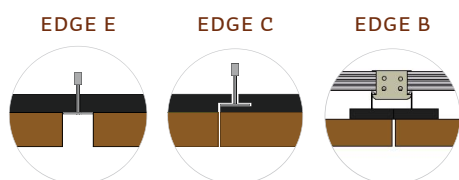

WOOD QUALITY



* Spruce only eco

WOOD SPECIES



FINISHING




ACOUSTIC FLEECE



- Acoustic properties
- High puncture and tear resistance
- Moisture resistance and non-fraying
- Fire resistance- classified B-s1,d0

SOUND ABSORPTION VALUES

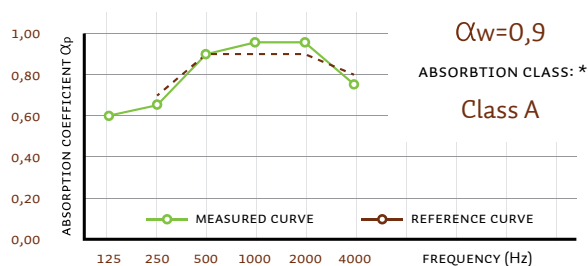


* Acoustic absorption as per ISO 354 standard, various data calculated according to ISO. Nordic Wood Linear + addition MW 20 mm.
** Depending on the type of wood

PRODUCT RANGE

1.

LINEAR SPECIAL 17/X



2.

SPECIAL ON REQUEST

Product range for Nordic Wood PANEL

T-PROFILE, SCREW MOUNTING



PANEL
DIMENSIONS



20x40




20x90




Special size
on request

VISIBLE
EDGE TYPE


EDGE E



EDGE C



EDGE B




WOOD QUALITY

PREMIUM



ECO



* Spruce only eco

WOOD SPECIES

BIRCH



SPRUCE



PINE



LARCH



OAK



THERMO



NEW

FINISHING

VARNISH

STAIN

WAX
COLOR

OIL

NATURAL

ACOUSTIC FLEECE

WHITE



GREY




BLACK



- Acoustic properties
- High puncture and tear resistance
- Moisture resistance and non-fraying
- Fire resistance- classified B-s1,d0

SOUND ABSORPTION VALUES

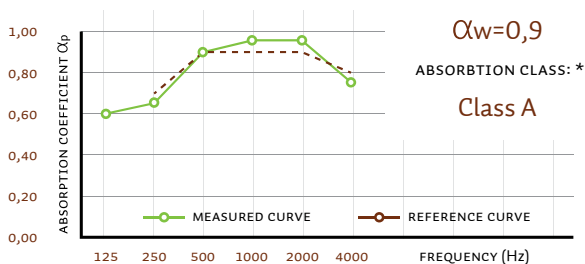

* Acoustic absorption as per ISO 354 standard, various data calculated according to ISO. Nordic Wood Linear + addition MW 20 mm.
** Depending on the type of wood

REACTION TO FIRE **


ACCORDING TO

EN 13501-1
B-s₁,d₀

PRODUCT RANGE


1.

PANEL 40/7




2.

PANEL 40/9




3.

PANEL 90/5



4.

PANEL 90/6



5.

SPECIAL ON REQUEST